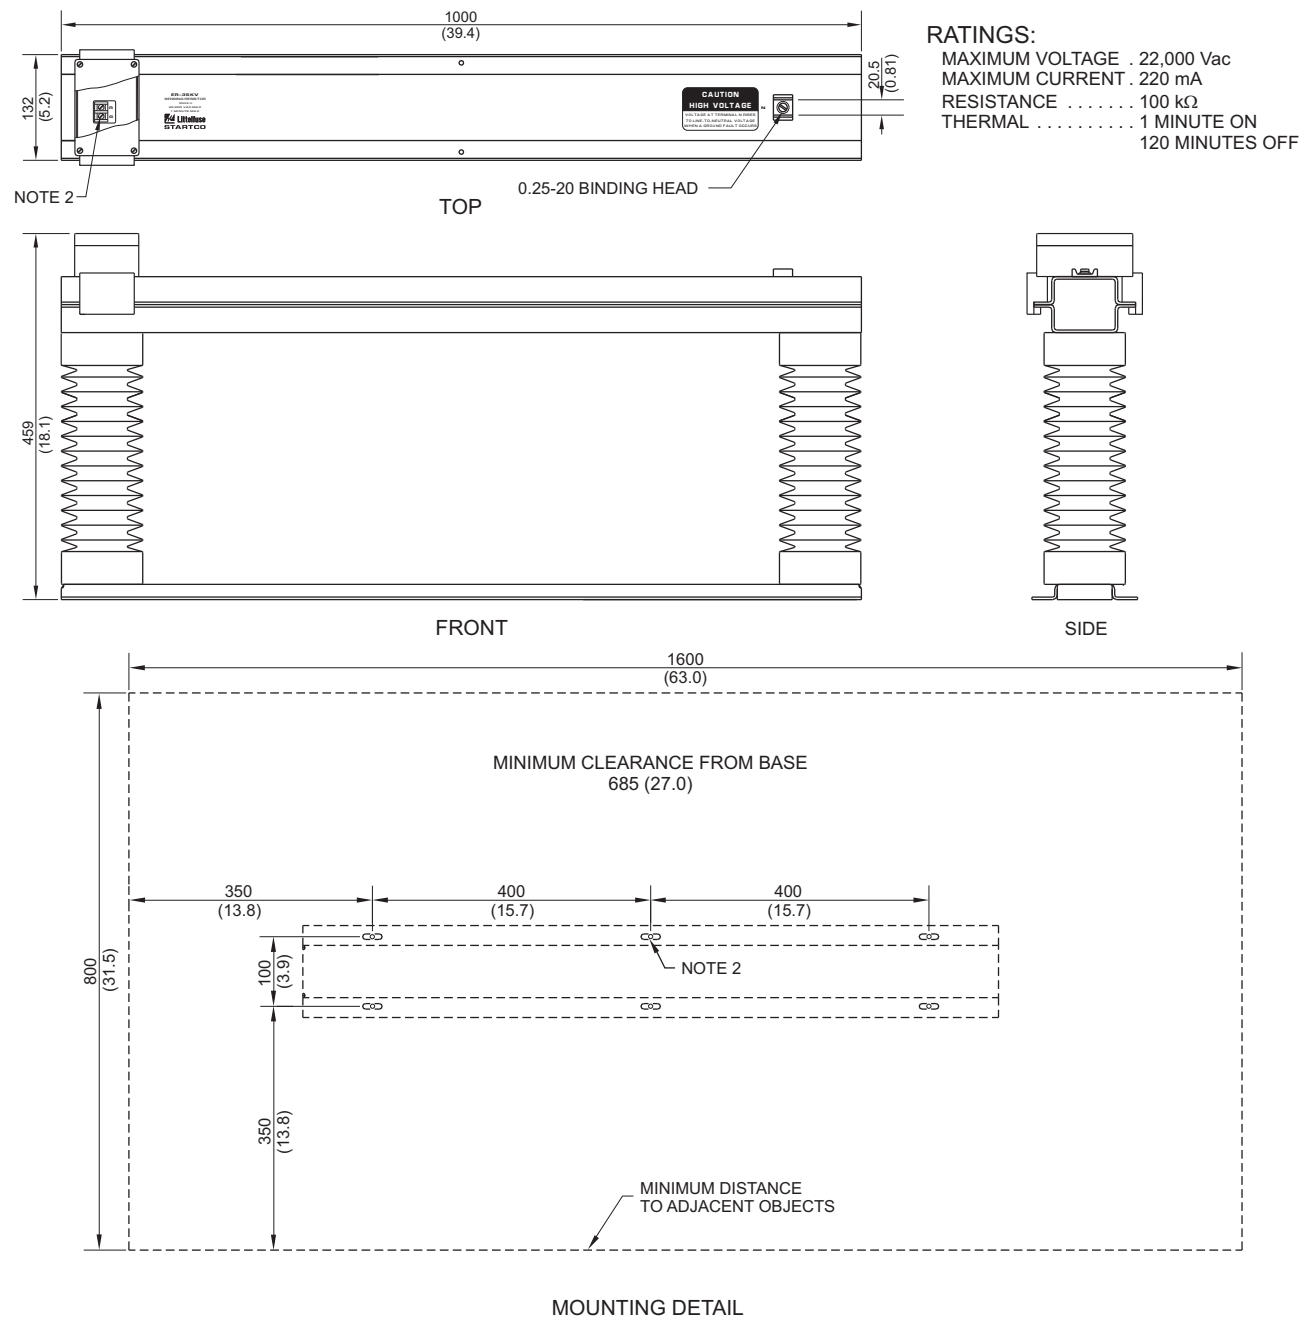

RATINGS:

MAXIMUM VOLTAGE . 22,000 Vac
MAXIMUM CURRENT . 220 mA
RESISTANCE . . . . . 100 kΩ
THERMAL . . . . . 1 MINUTE ON
120 MINUTES OFF

MOUNTING DETAIL

NOTES:

1. DIMENSIONS IN MILLIMETRES (INCHES)
2. TERMINAL-BLOCK SCREWS: 6-32 x 0.25.
3. MOUNTING SCREWS: M6 OR 0.25-20.
4. USE LIQUID-TIGHT GLAND FOR TERMINAL-BLOCK-ENCLOSURE CABLE ENTRY.
5. MOUNT AS SHOWN WITH BASE HORIZONTAL.

FIGURE 10. ER-35KV Sensing Resistor.