
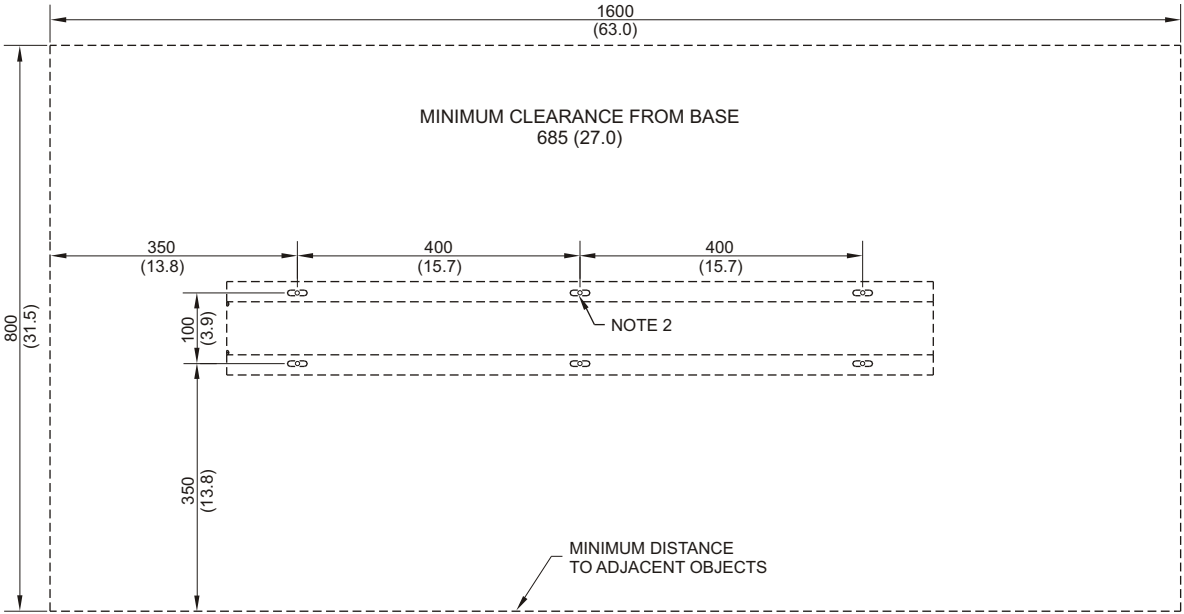


RATINGS:
 MAXIMUM VOLTAGE . 22,000 Vac
 MAXIMUM CURRENT . 220 mA
 RESISTANCE 100 kΩ
 THERMAL 1 MINUTE ON
 120 MINUTES OFF

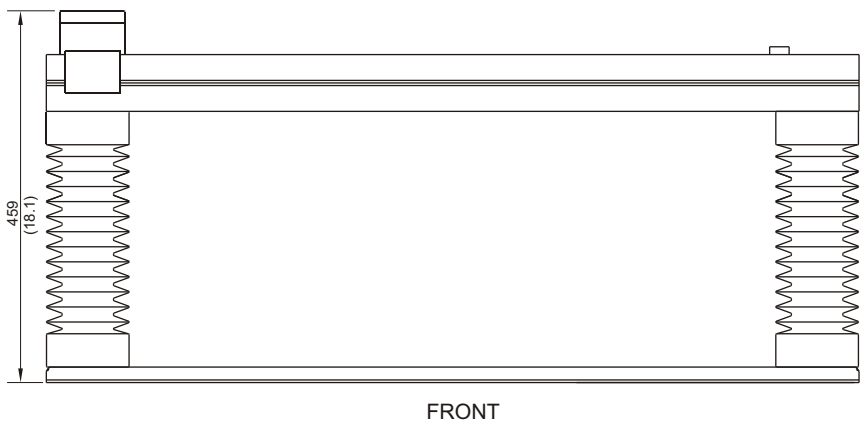

MOUNTING DETAIL

- NOTES:**
1. DIMENSIONS IN MILLIMETRES (INCHES)
 2. TERMINAL-BLOCK SCREWS: 6-32 x 0.25.
 3. MOUNTING SCREWS: M6 OR 0.25-20.
 4. USE LIQUID-TIGHT GLAND FOR TERMINAL-BLOCK-ENCLOSURE CABLE ENTRY.
 5. MOUNT AS SHOWN WITH BASE HORIZONTAL.

ER-35KV SENSING RESISTOR