


RATINGS:

MAXIMUM VOLTAGE . 600 Vac
 MAXIMUM CURRENT . 30 mA
 RESISTANCE 20 kΩ
 THERMAL:
 420 Vac CONTINUOUS
 600 Vac 6 MINUTES ON,
 60 MINUTES OFF

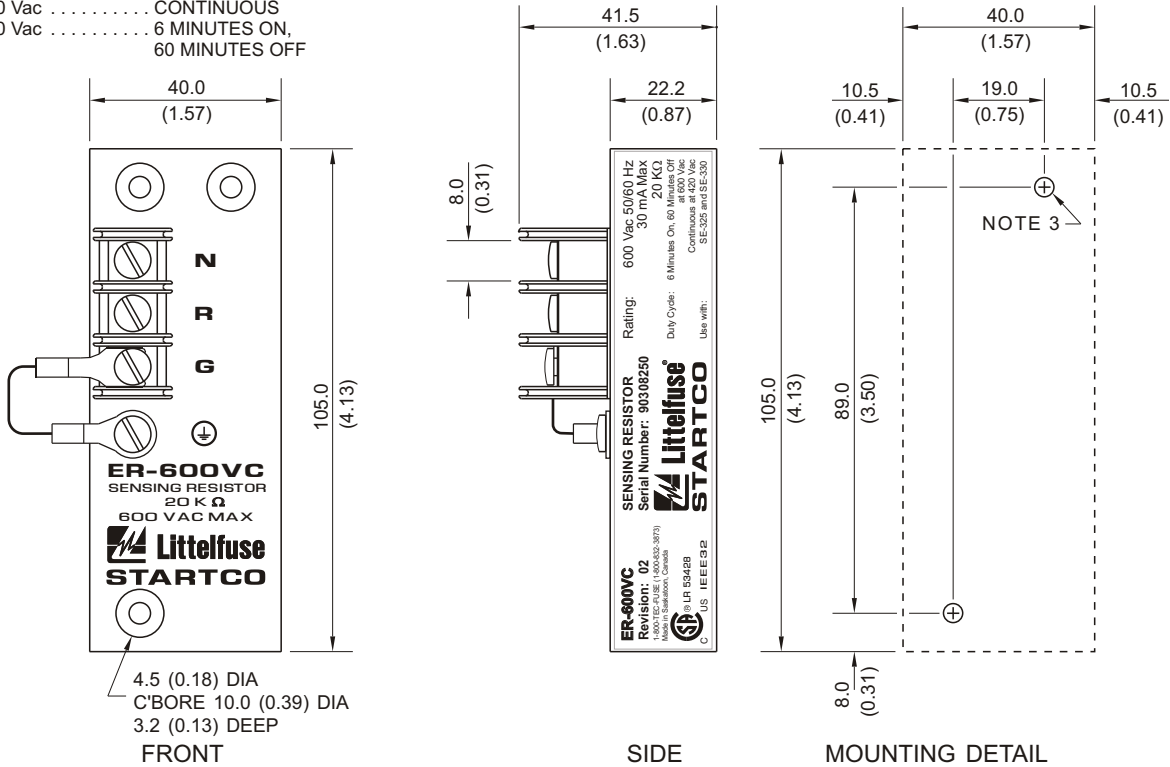

NOTES:

1. DIMENSIONS IN MILLIMETRES (INCHES).
2. TERMINAL-BLOCK SCREWS: 6-32 x 0.25.
3. MOUNTING SCREWS: M4 OR 8-32.
4. ON REVISION 2 UNITS ENCLOSURE IS ELECTRICALLY CONNECTED TO TERMINAL G THROUGH JUMPER FROM TERMINAL G TO ⊕ SCREW. THIS CONNECTION MAY BE REMOVED FOR DIELECTRIC STRENGTH TESTING. ENSURE THAT THE JUMPER IS INSTALLED AFTER TESTING.
5. ON REVISION 1 UNITS, ⊕ SCREW IS NOT PRESENT AND ENCLOSURE IS ELECTRICALLY CONNECTED TO TERMINAL G.

ER-600VC SENSING RESISTOR