


CT-01 : GROUND-FAULT-CT SELECTION FLOWCHART

Applicable Products: MPU-32, MPS, SE-330, SE-701, SE-703, FPU-32

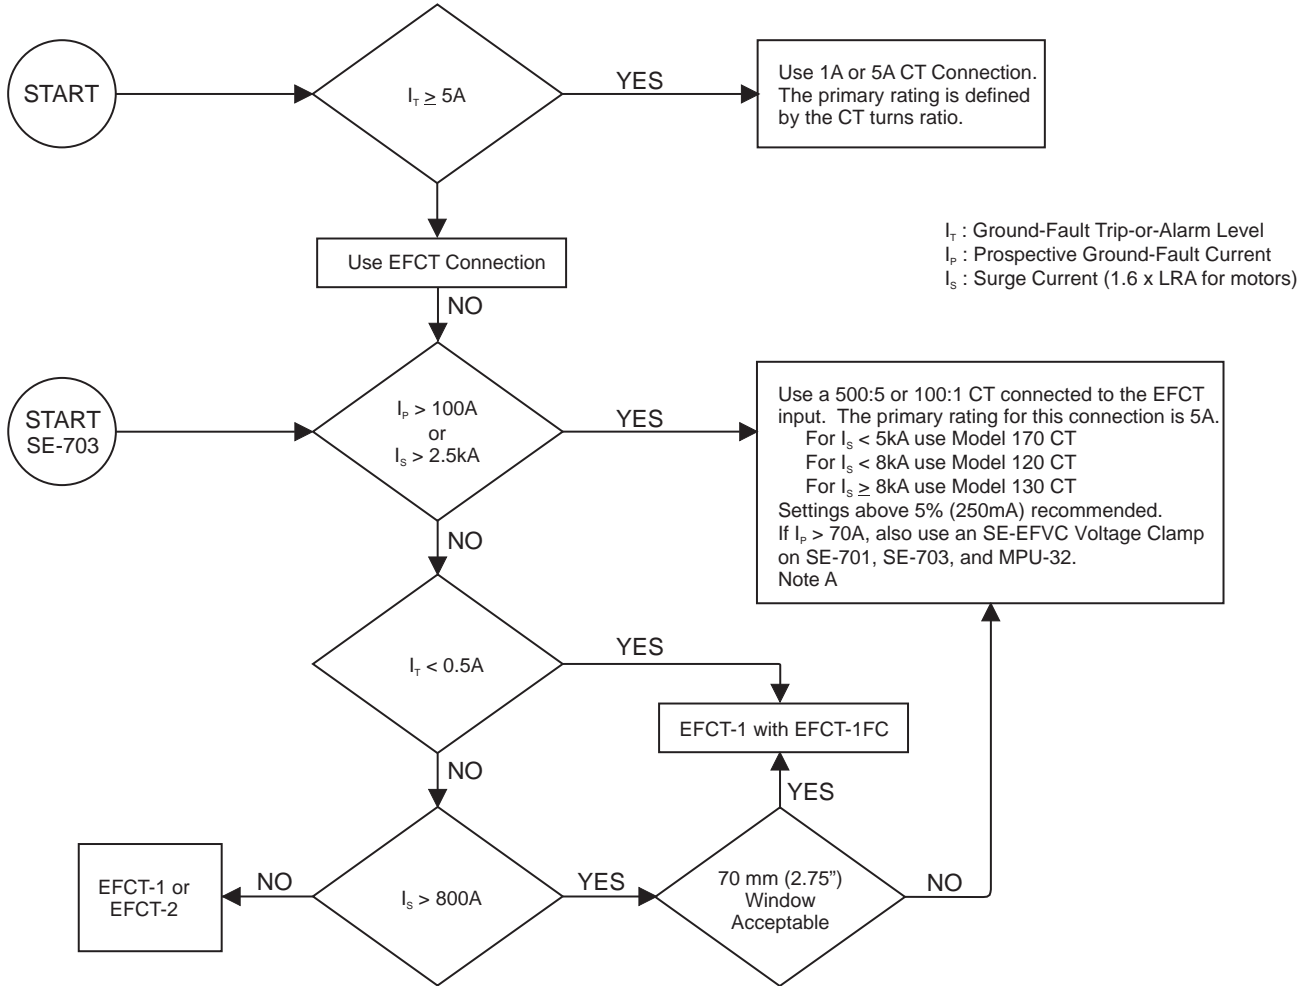

Note A:

- 120-501: 500:5 Model 120 CT, 146mm (5.75") Window, 5 kg (11 lb)
- 130-501: 500:5 Model 130 CT, 146 mm (5.75") Window, 8.2 kg (18 lb)
- 170SHT-501: 500:5 Model 170 CT, 108 mm (4.25") Window, 1.4 kg (3 lb)
- Other 500:5 or 100:1 CT's may work but the user should test to verify performance.

Note B:

- EFCT-1: CT with no flux conditioner, 82 mm (3.23") Window.
- EFCT-1FC: EFCT-1 flux conditioner, 70 mm (2.75") Window.
- EFCT-2: CT complete with flux conditioner, 140 mm (5.50") Window.

See the "Monitoring Neutral-Grounding Resistors - An Update" paper for ground-fault settings in resistance-grounded applications.